


50322

1. Carefully lay down the FLS Cart




FEET




X4

HEX KEY


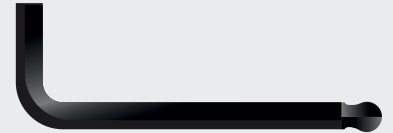


X1

2. Remove all 4 wheels using the hex key provided

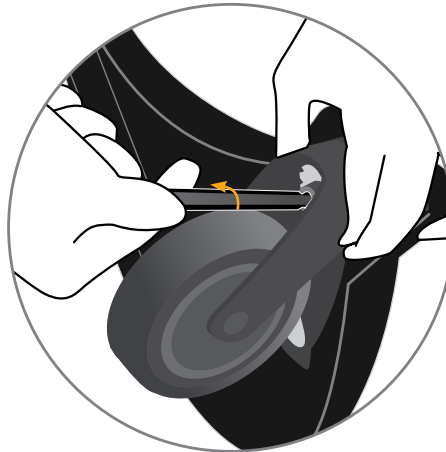

3. Attach the flat feet to the FLS cart using a flathead screwdriver

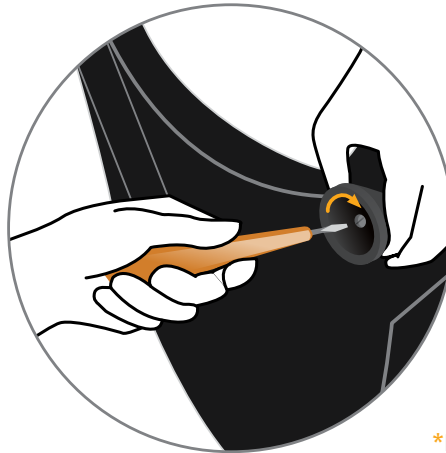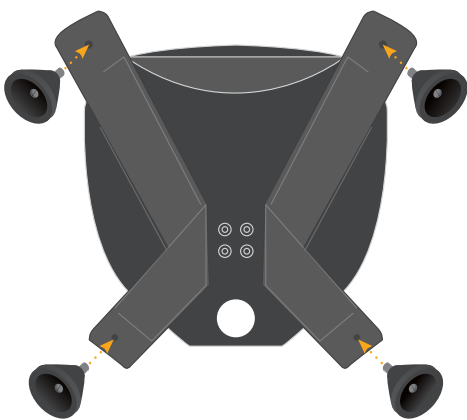

*Flathead screwdriver is not included in the kit